



DHM-66L9/FS-410W


DHM-66L9/FS-415W

P V M o d u l e
Full Screen

No Dust and Dirt on the Surface Increase Power Generation

Quality Guarantee

- 25-year → Material & technology warranty
- 25-year → Linear power output warranty

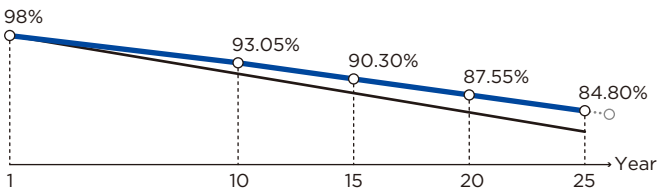

- DAH Solar Linear power output guarantee
- Standard Linear power output guarantee

*Subject to the terms and conditions contained in the applicable Warranty Statement. Also this 25-year limited product warranty is available only for products installed and operating on residential rooftops in Australia.



IEC 61215 / IEC 61730 / CE / FIDE / INMETRO
ISO 45001: 2018/International standards for occupational health & safety
ISO 14001: 2015/Standards for environmental management system
ISO 9001: 2015/Quality management system

Fire safety class:

Class C according to ANSI/UL 1703-2018(as per ANSI/UL 790-2018)



Optimal Process Design
166mm+9BB+Half-cut,
higher power output



Curved Surface 128° R Angle Reduce holding pressure by 75%+
Curved frame with ergonomic design, optimized delivery and Installation experience.



Higher Power Gains and Lower Losses
Excellent low irradiance performance and low shadow loss

DHM-66L9/FS

410~415W




Mechanical Specification

Cable	4.0mm ² , 300/400mm in length,
(Including connector)	length can be customized
No.of Cells	132 (6×22)
Glass	3.2mm High Transmission, Antireflection Coating
Junction box	IP68, 3 Bypass Diodes
Connector	PV5e, Changshu Friends Connector Technology Co.,Ltd, Customized Connectors
Weight	22kg
Cells Type	Mono 166×83mm
Dimension (L×W×T)	1924×1038×32mm
Packing	34pcs/pallet, 816pcs/40HQ

Operating Parameters

Maximum system voltage	1500V DC
Operating Temperature	-40 ~ +85°C
Maximum series fuse rating	20A
Snow load, frontside/Wind load, backside	5400Pa/2400Pa
Nominal operating cell temperature	45°C±2°C
Application level	Class A

Design

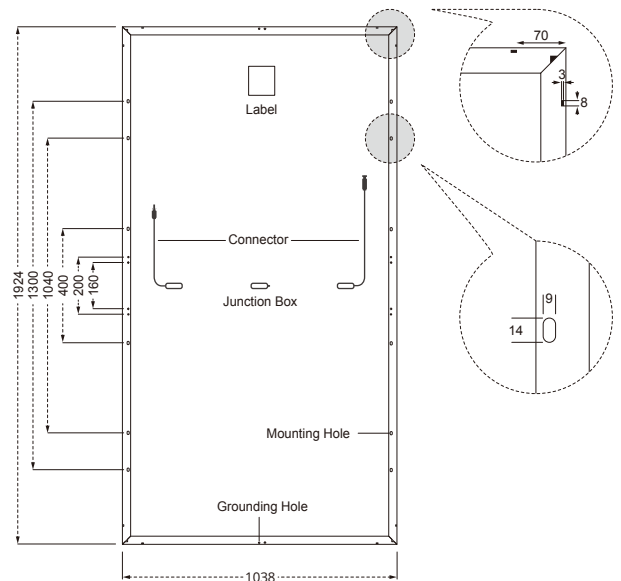

STC — Electrical Characteristics

Module Type	DHM-66L9/FS-410W	DHM-66L9/FS-415W
Maximum Power (Pmax/W)	410	415
Open-circuit Voltage (Voc/V)	45.2	45.4
Maximum Power Voltage (Vmp/V)	37.6	37.8
Short-circuit Current (Isc/A)	11.36	11.42
Maximum Power Current (Imp/A)	10.90	10.98
Module Efficiency (%)	20.53	20.78

Power Tolerance: 0~+5W, Temperature Coefficient of Isc: 0.05%/°C, Temperature Coefficient of Voc: -0.31%/°C, Temperature Coefficient of Pmax: -0.35%/°C


Standard Test Environment : Irradiance 1000W/m², Cell temperature 25°C, Spectrum AM1.5 Tolerances: Pmax=±3%, Voc=±3%, Isc=±3%

NOCT — Electrical Characteristics

Maximum Power (Pmax/W)	305	309
Open-circuit Voltage (Voc/V)	42.4	42.6
Maximum Power Voltage (Vmp/V)	35.3	35.5
Short-circuit Current (Isc/A)	9.18	9.23
Maximum Power Current (Imp/A)	8.65	8.71

Standard Test Environment : Irradiance 800W/m², Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

I-V Curve DHM-66L9/FS-415W

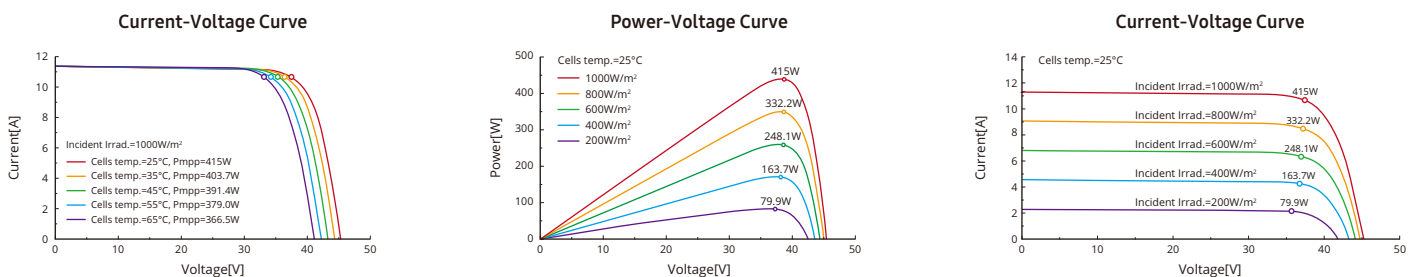

Made in China