

# TOPCon

DHN-T72X10/BF

0~+5W

## 570~600W



### Higher Power Generation Efficiency

N-type TOPCon module could increase power generation by 3%+ per watt compared with PERC module



### Higher Power Output

Bifacial module back-side power increases 5-25%



### Lower Degradation Rate, PID Resistance

First-year  $\leq 1\%$ , 2-30 year  $\leq 0.4\%$ ; excellent Anti-PID performance



### Lower Temp. Coefficient

More power generation under high-temperature



### Better Dim Light Performance

Excellent performance under dim light

## Comprehensive Products & System Certificates

IEC 61215 / IEC 61730 / CE / INMETRO

ISO 45001: 2018/International standards for occupational health & safety

ISO 14001: 2015/Standards for environmental management system


ISO 9001: 2015/Quality management system



## Quality Guarantee

15-Year Material & Technology Warranty


30-Year Linear Power Output Warranty

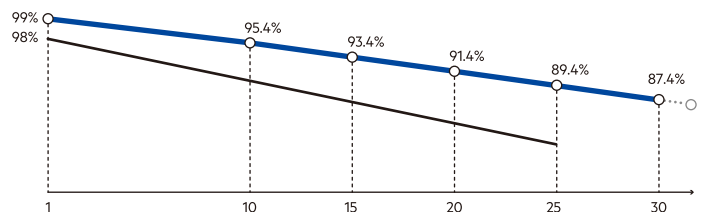

▲ DAH Solar Linear power output guarantee    ▾ Standard Linear power output guarantee

### Mechanical Specification

Cable	4.0mm <sup>2</sup> , 350/250mm in length, (Including Connector) length can be customized
No.of Cells	216 (6×36)
Glass	3.2mm High Transmission, Antireflection Coating
Junction Box	IP68, 3 Bypass Diodes
Connector	MC4 Compatible
Weight	29kg
Cells Type	N-type 182×60.7mm
Dimension (L×W×T)	2279×1134×35mm
Packing	31pcs/Pallet, 620pcs/40HQ

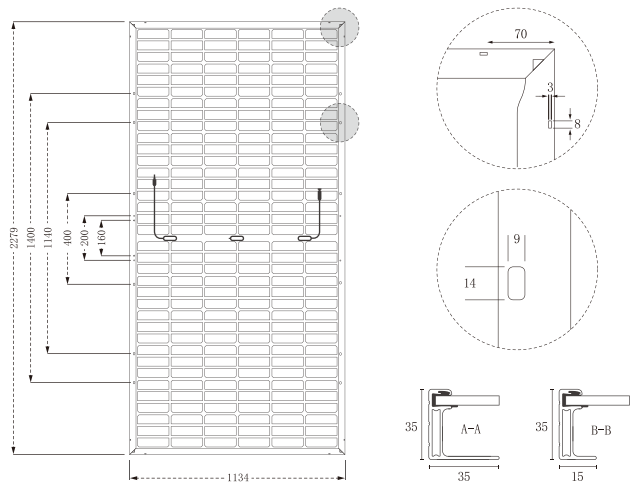

### Electrical Characteristics

Module Type	DHN-T72X10/BF													
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT		
Maximum Power (Pmax)	570	429	575	432	580	436	585	440	590	444	595	447	600	451
Open-circuit Voltage (Voc)	75.50	71.73	75.70	71.92	75.90	72.11	76.10	72.30	76.30	72.49	76.50	72.68	76.70	72.87
Maximum Power Voltage (Vmp)	63.8	60.61	64.0	60.80	64.2	60.99	64.4	61.18	64.6	61.37	64.8	61.56	65.0	61.75
Short-Circuit Current (Isc)	9.55	7.71	9.61	7.76	9.67	7.80	9.73	7.85	9.79	7.90	9.85	7.95	9.91	8.00
Maximum Power Current (Imp)	8.93	7.07	8.98	7.11	9.03	7.15	9.08	7.19	9.13	7.23	9.18	7.27	9.23	7.31
Module Efficiency (STC)	22.06%		22.25%		22.44%		22.64%		22.83%		23.02%		23.22%	
Refer Bifacial Factor	80±5%													

STC: Standard Test Environment : Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, Spectrum AM1.5

NOCT: Standard Test Environment : Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

### Double-Sided Power Generation Parameters (Rear gain)

5%	Maximum Power (Pmax)	599	604	609	614	620	625	630
	Module Efficiency (%)	23.16	23.36	23.56	23.77	23.97	24.17	24.38
15%	Maximum Power (Pmax)	656	661	667	673	679	684	690
	Module Efficiency (%)	25.36	25.59	25.81	26.03	26.25	26.48	26.70
25%	Maximum Power (Pmax)	713	719	725	731	738	744	750
	Module Efficiency (%)	27.57	27.81	28.05	28.29	28.54	28.78	29.02

### Operating Parameters

Maximum System Voltage	1500V DC
Power Tolerance	0~+5W
Operating Temperature	-40 ~ +85°C
Maximum Series Fuse Rating	20A
Nominal Operating Cell Temperature	42°C±2°C
Application Level	Class A

### Temperature Coefficient

Temperature Coefficient of Isc ( α Isc )	0.046%/°C
Temperature Coefficient of Voc ( β Voc )	-0.25%/°C
Temperature Coefficient of Pmax ( γ Pmp )	-0.30%/°C

### Mechanical Loads

Snow load, frontside / Wind load, backside	5400Pa/2400Pa
--	---------------

### I-V Curve

